


ADAPTING LOOX3 DRIVER TO LOOX5 DISTRIBUTOR

Loox3 12v 60W drivers are supplied with a special Y-splitter/adapter that includes a Loox5 socket and Loox3 plugs which are inserted into two Loox3 driver ports. This is required since the Loox3 60W Driver has a maximum load of 30 watts per port. This Y-splitter/adapter allows users to connect a distributor or mesh box with a load of up to 60 watts to the driver.

DISTRIBUTOR CONNECTIONS WITH LOOX3 DRIVER AND Y-SPLITTER ADAPTER

1. Plug power cord into driver
2. Plug the Y-splitter/adapter into driver
3. Connect Y-splitter/adapter to distributor or mesh box. An optional extension lead may be used, if desired.

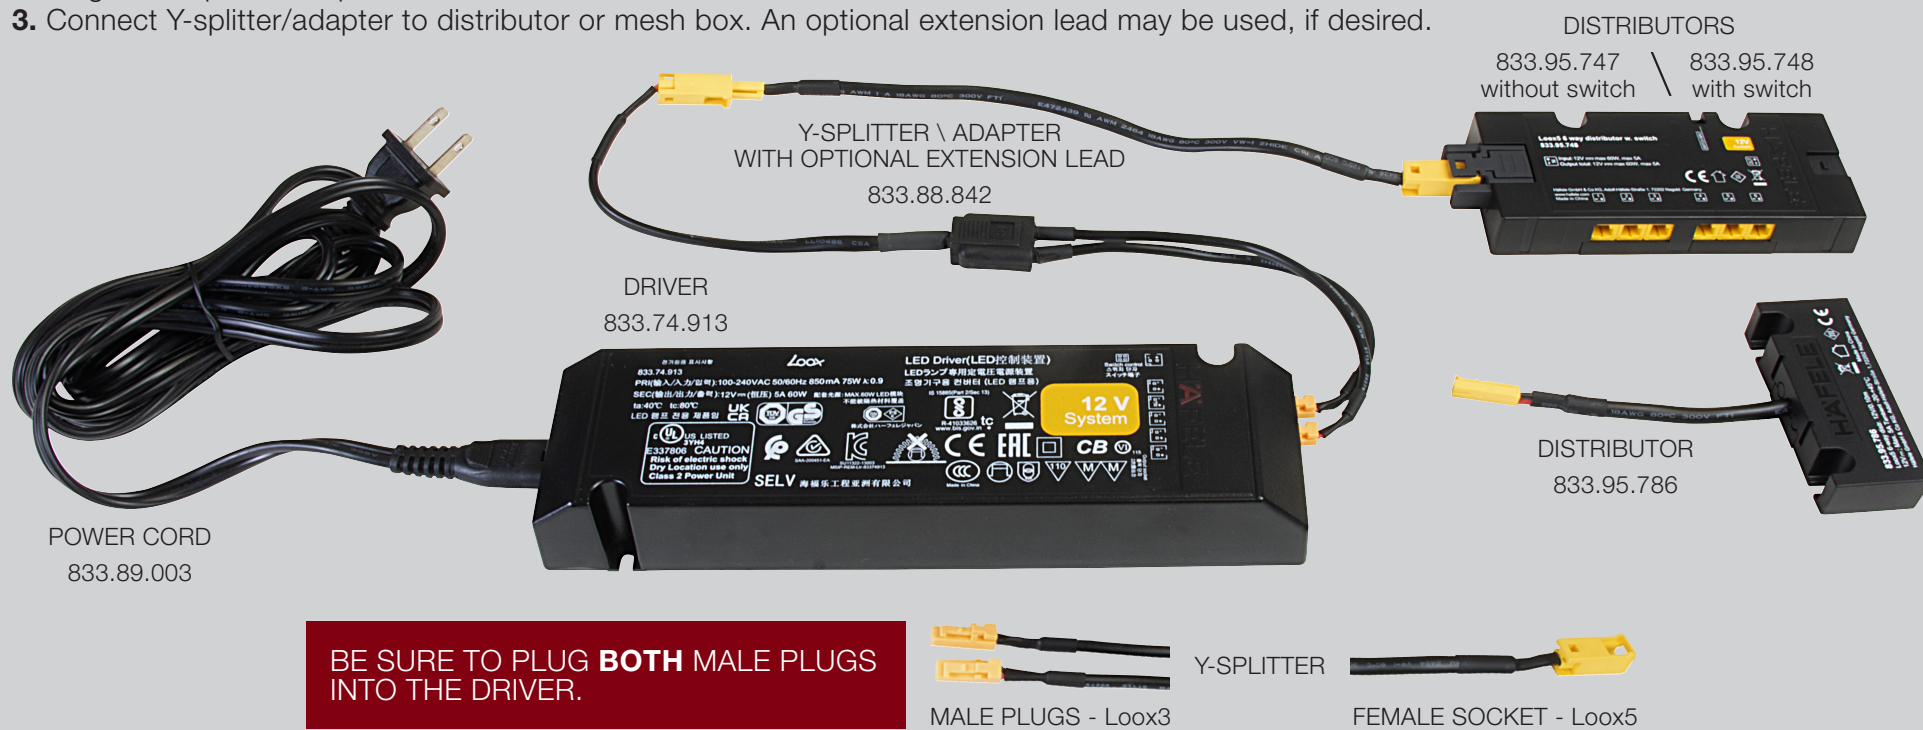

BE SURE TO PLUG BOTH MALE PLUGS INTO THE DRIVER.